

cmc
XTRM

S18F



CERTIFICAZIONE
DI PRODOTTO
BUREAU VERITAS
Certification



www.cmclift.com



Simplicity is its great strength

S18F it is the greatest of the new F-Series, full hydraulic with 1 pantograph plus 2 telescopic boom extensions, plus an articulating jib. Easy to use, it can be towable on a trailer thanks to a weight of only 2390 Kg. This makes it the perfect platform for any vehicle/equipment fleet.



Σ DETAILS



TOWABLE WITH TRAILER



PROPORTIONAL HYDRAULIC CONTROLS



EMERGENCY CONTROLS



WIRED REMOTE CONTROL FOR TRACKS



ADJUSTABLE TRACKS IN HEIGHT AND WIDTH



HONDA ENGINE GX390



QUICK DETACHABLE BASKET



Articulated platform with pantograph and telescopic boom, multi-function, easy to use and with absolutely amazing performances. The mechanically variable track in height and width, the excellent value for money and intuitive controls, make it an extremely multi-function platform, suitable for both end users and the rental companies.

Standard Equipment

S18F is supplied with Honda GX390 petrol engine, mechanically adjustable undercarriage in height and width, quick-detachable two-men basket 140x70x110 cm, equipped with wheels, 200 bar air/water hose in basket, 12 V electrical socket in basket, 120 V/220 V auxiliary electric motor, outriggers – cylinder cover, display for error code detection, proportional hydraulic controls, wired remote control for travel mode, parking-mode function (jib-lifting), 12 months warranty, standard painting (RAL 3000).






Available Accessories:

- Yanmar Diesel engine L100N6CF1T1AA
- Honda iGX390 petrol engine
- Full lithium battery (160 Ah) version
- No marking tracks
- Hydraulic motors with double travel speed of tracks
- Basket rotation (+/-90°)
- 1 or 2-men fiberglass basket
- Remote connection kit
- Customized colors

The specifications and characteristics indicated are subject to change and are not binding.



TECHNICAL DATA

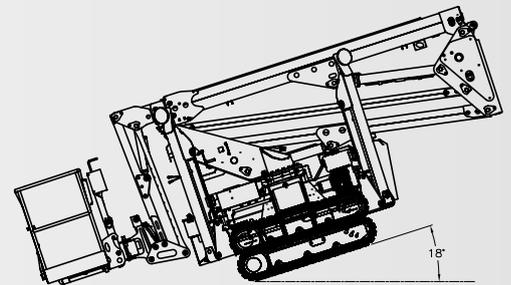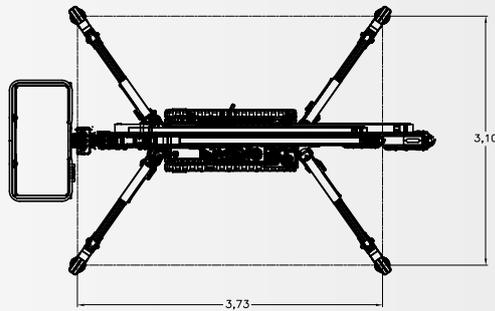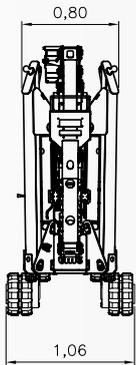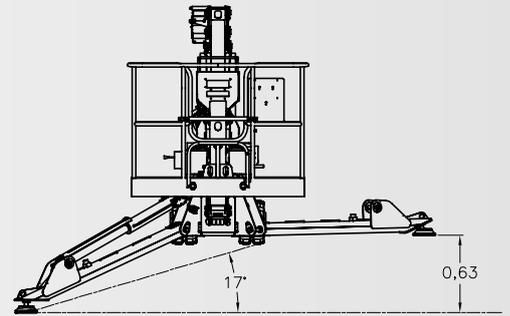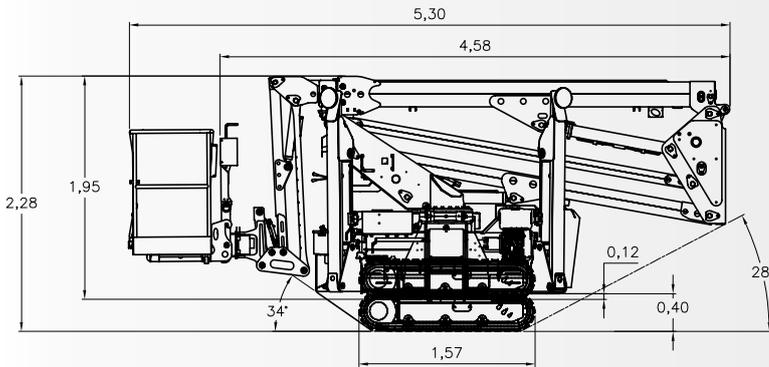

MAXIMUM LOAD

230 KG + + 40 KG 80 KG



PERFORMANCE



17,78 m



+/- 90° optional



11,15 m



+/- 178° (356° non continui)



230 Kg



2490 Kg



1,4x0,7x1,1 m

